


Veneer Surfaces | Acoustic Fire Rated Doors | STC 35 & Fire-Rating 45-90 Min
Neutral Pressure, Positive Pressure, Environmental

Standard Models: AMC_DSR

Environmental Models: AMC_NAUF_DSR, AMC_DSR_SCS-COC-000675, AMC_NAUF_DSR_SCS-COC-000675

Product Features and Specifications	Interior use only
Thickness	1-3/4"
Acoustic Rating	STC 35 Operable
Fire Rating	ITS-WH 45-90 Minute
Maximum Size	Singles-4 x 9 Pairs-N/A DE Pairs-N/A
Minimum Size	1-7 1/2 x 3-6 1/2
Surface Material	Wood Veneers
Crossbands	One Piece High Density Fiberboard (HDF)
Vertical Edges	Manufacturers standard construction per label service listing
Horizontal Edges	Manufacturers standard construction per label service listing
Lite Openings	Anemostat LoPro frame required. Maximum visible glass size-24" x 52" with Firelite NT 3/16" glass. Maximum lite size of 1248 sq. in. *Factory glazing required *Lite openings exceeding 100 sq. in. or those exceeding 12" in width or 33" in length will not carry a Temperature Rise label
Machining	Listed and approved; cylindrical, mortise, electric cylindrical, electric mortise, card locks, EPT, electric hinge, 3/8" raceway, standard hinges
Exclusions	Laminate, Durable Surface, MDO, and Hardboard. Reveals, Applied Moulding, High-Impact Edge (PVC). Machining not listed in Machining section above.
Factory Finish	Clear, standard stain, or custom. Meets WDMA TR-8 and AWS System 9.
Warranty	Full; life of original installation. No exterior warranty
Seal System	Seal Set #8-Factory furnished Zero 369 Auto Door Bottom-Zero 119WB and 8145 Head & Jamb perimeter seals Threshold-Not required. Door bottom must have contact with a solid smooth surface.
Environmental Options & LEED Credit Contribution (Not all credits may be available with some constructions)	<ul style="list-style-type: none"> •MR 4-Recycled Content- all models •MR 6-Rapidly Renewable Materials - all models with Bamboo veneer •MR 7-Certified Wood- Contact Sales •IEQ 4.4-Low-Emitting Materials- all UF models No Added Urea Formaldehyde Resins •CARB Phase II Compliant
Quality Standards (Quality Assurance/ Industry Standards)	Aesthetic: WDMA I.S.1A Architectural Wood Flush Doors (Standard) *Other association aesthetic standards upon request
Door Weight	7.4 pounds per square foot

This Seal Set System includes #369 automatic door bottom, #119WB and #8145 Seals. Refer to installation instructions for this seal for specific details.

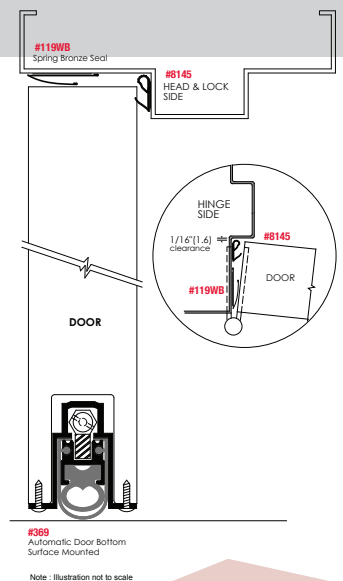

Note: Mohawk Flush Doors® are manufactured per the standards listed on this page.

Specifications are subject to change without notice.

*Note: Fire-Rated doors will be constructed per label service listing and may deviate from above.